

C4350Z-L4 v1.0 [J4125]

Integrated Intel® Celeron J4125 2.0GHz Quad core Quad thread processor



Main Features


- Intel Celeron J4125 2.0GHz quad-core integrated
- 1x 2400MHz DDR4 ram, up to 8GB
- Storage: SATA&MSATA
- 1x HDMI(4096x2160@30Hz)
- 4 x RJ_45 Gigabit Ethernet
- 2x DB9 Serial port
- 4x USB2.0/3.0
- DC_12V power input
- All aluminum alloy chassis,without fan

Specification :

Model NO.	C4350Z-L4 V1.0 [J4125]	
Chassis	Structure	Fanless structure, all aluminum alloy chassis
	Dimension	141.5mm*126mm*56.5mm
	Color	black
	Installation	Desktop/Wall mounted
Motherboard	Processor	Integrated Intel® Celeron J4125 2.0GHz quad-core quad-thread processor ; TDP 10W
	Chipset	SOC
	Display	Integrated Intel® UHD Graphics 600
	Memory	1* SODIMM slot, support single channel 2400MHz DDR4 ram, up to 8GB
Front I/O	Switch	1* Power switch ; 1*Reset switch
	LED	1*P.LED,1*H.LED
	Display interface	1*HDMI(4096X2160@30Hz)
	AC LOSS	1*AC LOSS(Power-on and switch-on toggle switch)
	USB	4*USB3.0 ; 1*USB2.0(built-in dongle)
	SIM	1* Standard SIM slot
Rear I/O	Ethernet	4*RJ45 Gigabit Ethernet, Intel I225V 2.5G chip, support Wake_on_LAN/PXE
	GPIO	1*6pin(support 2 input 2 output GPIO function,1 pin VCC,6 pin GND)
	Serial Port	2* DB9 RS_232 serial port (COM2 support RS_485)
	Power	1* DC_JACK , support DC_12V power input
Storage	SATA	1* SATA port, support 2.5" Notebook HDD
	SSD	1* MSATA slot, support SSD ,transfer rate up to 6Gbps
Expansion	Mini PCIE	1*Mini-PCIE slot, support 4G module
	M.2	1*M.2 slot, support M.2 2230 standard WiFi
OS support	Microsoft	Windows 10/Linux
	BIOS	64Mb Flash ROM
	Watch Dog	Support hardware reset function (L256, 0~255 seconds)
Power Require	Power Type	External power adaptor
	Voltage Input	DC_12V

	Power output	AC_to_DC 60W
Reliability	Working Temp.	-10°C ~ 60°C
	Storage Temp.	-20°C ~ 70°C
	Relative Humidity	5%-95% relative humidity, non-condensing
	Working Vibration	0.5g rms/5-500HZ/random/operating

Drawing :

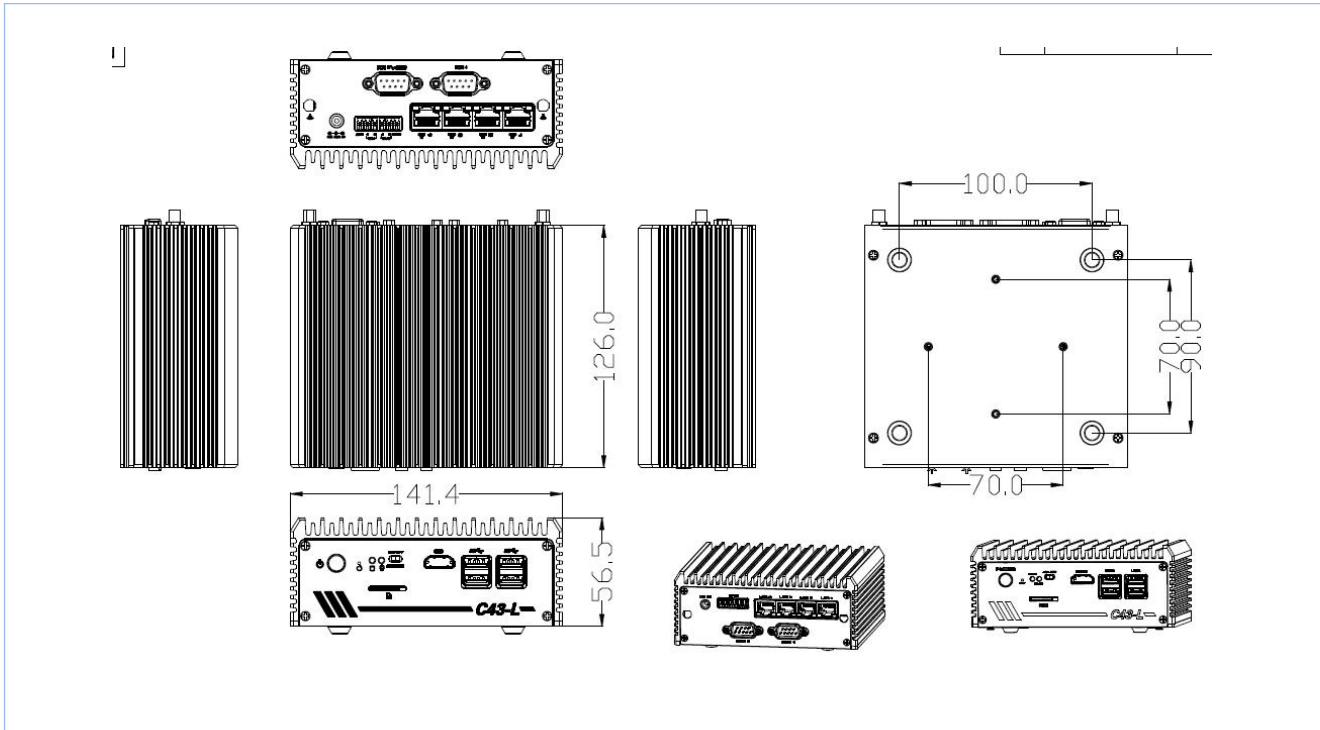

Front I/O View



Rear I/O View



C4350_L4 SERIES INFO:

No.	Model	Processor	Motherboard	IO Board	Memory	ETH	COM	HDMI	USB	SIM	power
1	C4350Z-L4 V1.0 (J4125)	J4125/2.0GHz	R41V	R36F-C2	1*SODDDR4	4	2	1	4	1	DC_12V