

# TPC150-W1010-I5

The overall use of flat aluminum alloy panel, fanless fully enclosed integrated design. Meet the requirements of different equipment in different environments. It is widely used in industrial control, military, communication, power, network, intelligent self-service terminal equipment and other automation applications.

## Features

- 3mm Super Thin Front Bezel, Best for Embedded Cabinet.
- Pure flat panel IP65 dust-proof and waterproof.
- High precision aluminum alloy material.
- Self-developed fanless X86 architecture industrial motherboard
- Dual gigabit adaptive Ethernet ports for faster transmission.
- Industrial protection, applicable to various harsh environments.
- Supporting 12V-36V wide voltage power supply;
- Rich interfaces and strong extensibili.



## Product Model

Product Size	15"
Non-touch	TPC150-W1000-I5
Capacitive touch	TPC150-W1010-I5
Resistive touch	TPC150-W1020-I5

## Product Interface



## Product Specifications

### Screen Parameters

LCD Size	15" TFT LCD
Resolution	1024*768
Viewing Angle	89/89/89/89 (L/R/U/D)
Colour	16.7M
Brightness	300 cd/m <sup>2</sup>
Contrast ratio	1000:1

### Touch Parameters

Touch type	10-point touch projection Capacitive touch screen	Single-point Resistance touch screen	Non-touch
Transmittance	≥88%	≥78%	≥92%
Input mode	Handwriting or Capacitance pen	Fingertip or stylus	/
Controller communication	USB	USB	/


### Hardware Configuration

CPU	I5-6200U	I5-7200U	I5-8265U	I5-10210U
CPU frequency	2.3GHz	2.5GHz	1.6GHz	1.6GHz
Integrated graphics	Inte HD Graphic 520	Intel HD Graphics 620	Intel Ultra HD Graphics 620	Intel UHD620 Graphics
RAM	4G DDR4(Optional 8G/16G/32G)	4G DDR4(Optional 8G/16G/32G)	4G DDR4(Optional 8G/16G/32G)	8G DDR4(Optional 16G/32G /64G)
Storage	128G SSD(256G/512G SSD, 1T/2T HDD Optional)			
WiFi	Dual band 2.4G&5G			
Bluetooth	BT4.0(Optional)			
Operating system	Win7/10/11, Ubuntu/Centos/Redhat/Debian/Linux			
Other support	Support RTC real-time clock and timing switch			

### Power parameters

Input voltage	DC 12V~36V	Static power	18W
---------------	------------	--------------	-----

## Product size

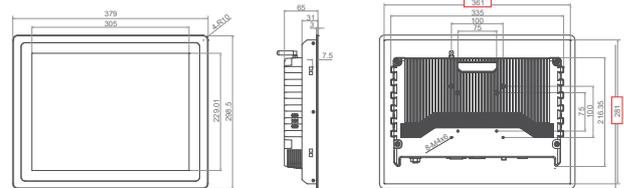

### Physical Characteristics

Overall dimensions	W379x H298.5x D65mm
Size of opening	W363 x H283mm

### Interface

Power interface1	1*DC 2.5, Supporting 12V-36V power input
Power interface2	1*Industrial terminal, Supporting 12V-36V power input
HDMI	1*HDMI, Supporting HDMI data output, Up to 4K
USB	2*USB 2.0 2*USB 3.0
LAN	2*LAN, Dual 1000M adaptive Ethernet
AUDIO	1*Audio Out, Support audio output
SIM	1*SIM, Supporting various formats (Depending on 3G/4G module)
VGA	1*VGA
COM	2*RS232
WiFi antenna	2*WiFi antenna
POWER	Support (1*POWER)
Grounding post	1*Grounding post (GND)

### Product Reliability

Working Temperature	-10°C to 60°C
Storage temperature	-20°C to 70°C
Relative humidity	Humidity: 95% Non-Condensing
Vibration protection	IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
Impact protection	IEC 60068-2-27, half sine wave, duration 11ms
Authentication	CCC/CE/FCC/EMC/CB/ROHS
Waterproof	Front panel reaches IP65 protection level