
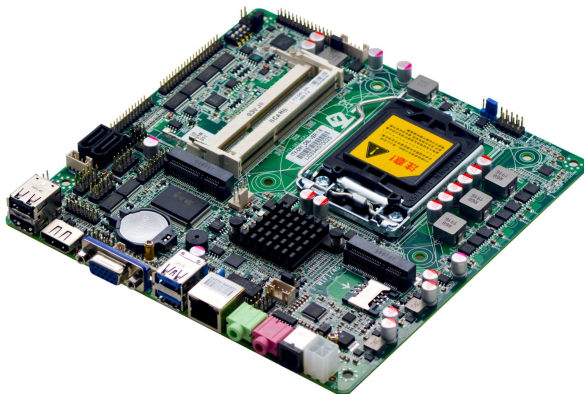



ITX-D81_D6L VER:1.6

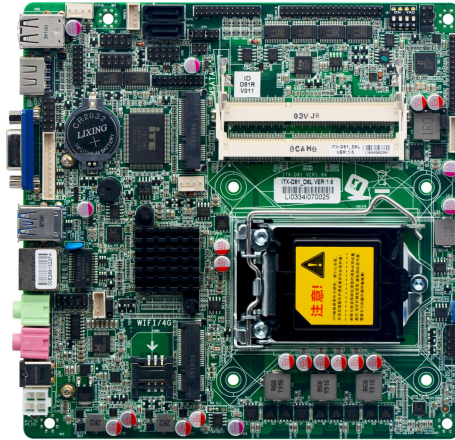

Mode No.	ITX-D81_D6L VER:1.6
Processor	Support LGA1150 Intel® Celeron/Pentium/Core™ i3/i5/i7 32nm/22nm processor
Chipset	Adopt Intel® H81 high speed chipset
Memory	2* DDR3 SODIMM,support dual channel1333/1600MHz memory,up to 16GB
Display	Integrated Intel® HD
	1*VGA, 2* HDMI, 1* support dual channels 24bit LVDS
	Support single display, double display, double extension..
Network	1* RTL8111F Gigabit Ethernet , supports wake on LAN/PXE.
Storage	1* SATA3.0 HDD interface and 1* SATA2.0 HDD interface
Audio	Onboard ALC662 6-channel high fidelity audio controller, support MIC /Line-out,amplifier
	Amplifier proposed using3Ω2W speakers
Expansion slot	1* Mini-PCIE slot,support WIFI、 4G module,
	1* MSATA slot, support SSD,the transfer rate up to 6Gbps.
Rear I/O	2* USB 2.0
	2* USB 3.0
	1* VGA DB15
	1* HDMI
	1* RJ-45 Gigabit Ethernet connector
	1* Line out(Green)
	1* Mic (Red)
	1* 12~19V DC power input
Internal I/O	1* LVDS, 2*15pin
	1* JVGA, 1*12pin (same signal with VGA)
	1* JHDMI 2*8pin, support dual HDMI display
	6* RS232 serial ports, COM3 support RS422/RS485 mode
	1* LPT print port, 2*13pin
	2* USB 2.0, 2*5pin
	2* USB 3.0, 2*10pin (B85/H87/Q87/Q85/Z87 chipset can support)
	1* front audio port, 2*5pin
	1* power amplifier, 1* 4pin
	1* front panel function buttons and indicator connector, 2*5pin
	1*ATX, 4pin power interface,support 12V ~ 19V power input/output (According to the output

	voltage of the power supply)
	1* LVDS Backlight power supply connector 1*6pin
	1* HDD power supply port 1*4pin
FAN interface	1* 4pin CPU Intelligent fan connector, 1*3pin system fan connector
GPIO	support 4 way input/output/GPIO
BIOS	32Mb Flash ROM
Watch dog	Support hardware reset function (L256, 0~255 seconds)
OS	Windows 7/Windows 10/Linux
Power input	Adapt DC 12V~19V power input
Working Temp.	-10℃~60℃
Storage Temp.	-20℃~70℃
Working Humidity	5%-95% (relative humidity; non-condensing)
Dimension	170mm x 170mm

Order information:

No.	Model	Processor	South bridge	Memory	VGA	HDMI	LVDS	LAN	USB	COM	RS485/422	Power
1	ITX-D81_D2L VER:1.6	LGA1150	H81	2*SODDDR3	1	2	2ch/24BIT	1*RTL8111F	6	2	/	DC/19V
2	ITX-D81_D6L VER:1.6	LGA1150	H81	2*SODDDR3	1	2	2ch/24BIT	1*RTL8111F	6	6	COM3	DC/19V