



ITX-Y410 VER:1.0

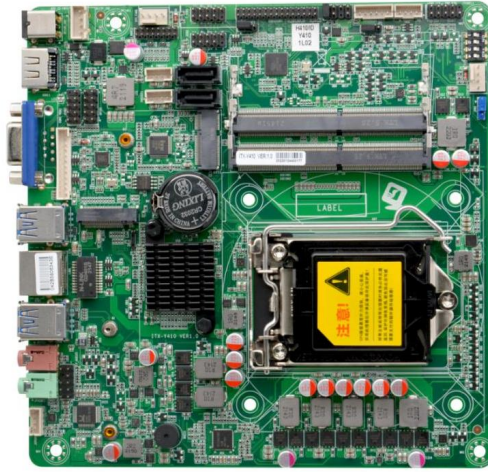

Model No.	ITX-Y410 VER:1.0
Processor	Supports LGA1200 10th Intel® Celeron/Pentium/Core™ i3/i5/i7/i9 processor Note: only support 10 th 6 core 65W and below CPU
Chipset	Adopt Intel® H410 high speed chipset
Memory	2* DDR4 SODIMM memory slot, supports highest 2933MHz memory, is up to 128GB
Display	Integrated Intel® HD Graphics. Supports DirectX12,OpenGL4.5, supports 4K/60Hz display
	1* VGA, the maximum resolution supported is: 1920X1200@60Hz
	2* HDMI, the maximum resolution supported is: 4096 x 2160@30Hz
	1* LVDS, supports dual channels 24bit Note: supports EDP (Shared pin with LVDS)
Ethernet	1* RTL8111H Gigabit Ethernet ,supports Wake on LAN/PXE function
Storage	2* SATA3.0, the transfer rate is up to 6Gbps
	1* M.2 slot, supports M.2 2260/2280 SATA standard SSD
Audio	Onboard ALC892 7.1+2 channel high fidelity audio controller, supporting MIC/Line-out, power amplifier Support power amplifier4Ω/3W dual channels
Expansion Slot	1* M.2 slot, supports M.2 2230 WIFI module
Rear I/O interface	4* USB3.0
	1* HDMI
	1* VGA
	1* RJ45 Gigabit Network Interface
	1* Line-out (Green), 1*MIC (Red)
	1* DC12~19V power input interface
Built in I/O interface	1* JVGA, 1*12pin (Same signal as VGA)
	1* LVDS/EDP, 2*15pin , supports dual channels 24bit
	1* Backlight power supply interface, 1*6pin
	1* Screen brightness adjustment interface, 1*4pin
	1* RS232 COM
	4* USB2.0, 2*5pin
	1* Front audio interface, 2*5pin
	1* Power amplifier interface, 1*4pin
	2* HDD power supply voltage interface, 1*4pin
	1* Front panel function button and indicator light interface, 2*5pin
	1* DC power interface, 1*4pin, supports DC12~19V power input output
Fan Connector	1*4pin CPU smart fan connector; 1*4pin system fan connector

GPIO	Support 4-way input output GPIO function
BIOS	128Mb Flash ROM
OS	Windows 10/Linux
Watchdog	Support hardware reset function (L256, 0~255 seconds)
Power Type	Supports DC12~19V power supply
Working temperature	-10℃~60℃
Storage temperature	-20℃~70℃
Working Humidity	5%-95%(relative humidity, non-condensing)
Dimension	170mm x 170mm

Order information:

No.	Model	Processor	Frequency	South bridge	Memory	VGA	HDMI	DP	LVDS	LAN	USB	COM	RS485/422	Power
1	ITX-Y410 VER:1.0	LGA1200	/	H410	2*SODDDR4	1	2	/	2ch/24bit	1*8111H	8	1	/	DC12~19V