

ITX-YL110V1_I726L




Main Features

- Integrated Intel® 11th Core i7-1195G7 2.9GHz quad-core eight-thread processor
- 2x SODIMM 3200MHz DDR4, up to 64GB
- 2x RJ45 GbE ports
- 1x eDP, 2x HDMI1.4, 1x LVDS
- 1x M.2, support WIFI module; 1x M.2, support 5G module
- 1x SATA3.0 ; 1x M.2
- 6x COM; 8x USB
- DC_12V power supply

Specification :

Model No.	ITX-YL110V1_I726L VER:1.0(1195G7)
Processor	Integrated Intel® Tiger Lake 11th Core i7-1195G7 2.9GHz quad-core eight-thread processor, TDP28W Compatible with Intel® Tiger Lake-U Celeron Penium Core i3/i5/i7 processors
Chipset	SOC
Memory	2x SODIMM slot, supports 3200MHz DDR4 memory up to 64GB
Display	Integrated Intel® UHD Graphics, supports DirectX 12 OpenGL 4.5, supports 4K 2x HDMI1.4 interface, the highest resolution supported is: 4096x2304@24Hz 1x Support dual-channel 24bit LVDS interface, 1x EDP interface, choose one of the two with LVDS through pop-up
Network	2x Intel ®I226V Gigabit Ethernet, supports Wake-on-LAN/PXE function(LAN2 and USB2.0 are listed together)
Storage	1x SATA3.0 hard disk interface, transmission speed up to 6Gbps 1x M.2 slot, supports M.2 2280 NVME PCIE x1/SATA adaptive Standard SSD
Audio	Integrated ALC897 7.1+2-channel high-fidelity audio controller, supports MIC, Line_out, and power amplifier Support amplifier 4Ω 3W speaker
Expansion slots	1x M.2 slot, supports M.2 Key E 2230 WIFI module 1x M.2 slot, supports M.2 Key B 2242/4452 5G module
Backplane I/O interface	4x USB3.0 interface 2x HDMI1.4 2x RJ45 Gigabit network interface (one network port is listed with USB2.0) 1x Line-out(green), 1*MIC(red) 1x DC12V power interface, supports 12V power input 1x SIM card slot
Built in I/O interface	1x LVDS interface 2x 15pin, supports dual channel 24bit, 1x LVDS backlight power supply interface 1x 6pin 1x EDP interface 2x 15pin, choose one of the two with LVDS through pop-up 6x RS232 serial interface, COM2/3 supports RS485/422 function, 1x PS/2 keyboard and mouse interface (red) 1x 6Pin 2x USB2.0 interface 2x 5pin 2x USB3.0 interface 2x 10pin 1x Front audio interface 2x 5pin 1x Front panel switch button and indicator light interface 2x 5Pin 1x Hard drive power supply interface 1x 4pin 1x Power amplifier interface 1x 4pin 1x DC power interface 1x 4pin (can be used as 12V input power interface)
Fan	1x 4pin CPU fan interface; 1x 4pin system fan interface
GPIO	Supports four-in and four-out GPIO functions
BIOS	128Mb Flash ROM
Watchdog	Support hardware reset function (level 256, 0~255 seconds)
OS	Windows 10/Linux
Power supply	DC 12V
Working temperature	0°C~60°C

Storage temperature	-20°C ~ 70°C
Working Humidity	5%-95% (relative humidity, non-condensing)
Dimension	170mm x 170mm

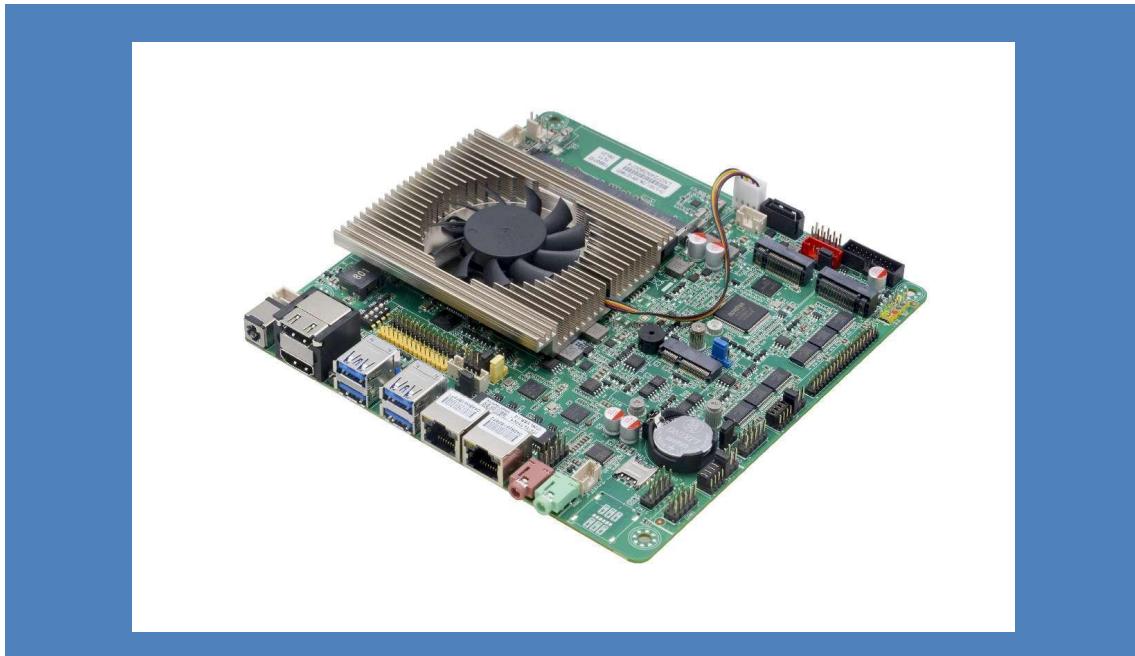

Ordering info:

NO.	Model	Processor	Frequency	Memory	VGA	HDMI	LVDS	EDP	LAN	USB	COM	485/422	Power
1	ITX-YL110V1_I726L VER:1.0	I7-1195G7	2.9G	2*SODDR4	1	2	2ch/24Bit	1	2*1226V	8	6	COM2/3	DC12V