
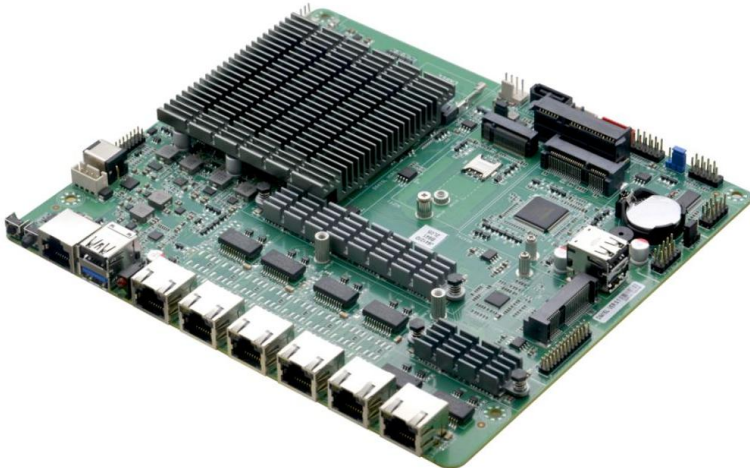



D641SL VERO.1

[Celeron J6412]

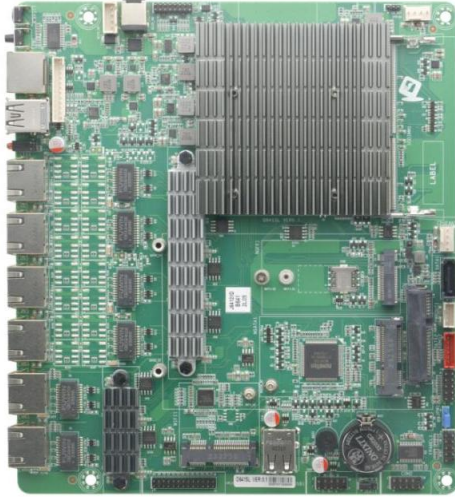

Model No.	D641SL VER:0.1
Processor	Integrated Intel®Celeron J6412 2.0GHz Quad core Quad thread processor ,TDP 10W Compatible with the full range of Intel® Elkhart Lake CPUs, allowing customers to choose flexibly
Chipset	SOC
Memory	1* SODIMM slot,supports single channel 2400MHz DDR4 memory,up to 16GB
Display	Integrated Intel® UHD Graphics ,Provide 1*VGA, 1*HDMI display output
Ethernet	6* Intel I226V Gigabit Ethernet,supports Wake on LAN/PXE function
Storage	1* SATA3.0 2.5-inch notebook hard disk slot, hard disk can be installed directly
	1* 7pin SATA3.0 HDD slot, the transfer rate is up to 6Gbps,Choose one of the 2.5-inch hard drive slots, the default is 2.5-inch
	1* MSATA slot, support Intel protocol SSD, the transfer rate is up to 6Gbps
Expansion Slot	1* Mini-PCIE slot ,supports WIF module
	1* M.2 slot,supports M.2 2242/2252 4G/5G module
Rear I/O interface	1* CISCO standard RS232 serial interface
	2* USB 2.0 interface
	6* RJ-45 Gigabit Network Interface
	1* Power switch, 1* Reset switch
	1* Power Indicator (Green) / HDD indicator (Red)
	1* DC power interface, supports 12V power input and output (side)
Built in I/O interface	1* JVGA interface 1*12pin
	1* JHDMI interface 2*8pin
	1* Network Indicator interface 2*13pin
	1* RS232, 2*5pin
	2* USB2.0 interface 2*5pin
	2* standard USB2.0接口
	1* HDD power supply interface 1*4pin
	1* Front panel function button and indicator light interface, 2*5pin
	1* PS/2 keyboard and mouse interface, 1*6pin

	1*4pin DC power input interface, supports 12V power input output
Fan Connector	1* 4pin CPU smart fan connector, 1* 4pin system fan connector
GPIO	Support 4-way input output GPIO function
BIOS	64Mb Flash ROM
Watchdog	Support hardware reset function (L256, 0~255 seconds)
Power Type	DC 12V
OS	Window 10/Linux
Working temperature	-10℃ ~ 60℃
Storage temperature	-20℃ ~ 70℃
Working Humidity	5%-95%(relative humidity, non-condensing)
Dimension	200mm x 180mm

Order information:

No.	Model	Processor	Frequency	Memory	VGA	HDMI	LAN	USB	COM	BYPASS	Power
1	D641SL VER:0.1	J6412	2.0GHz	1*SODDDR4	1	1	6*226V	6	1	X	DC12V