

R41SLZ-B

Intel® Celeron Processor
1U standard soft routing




Product Features

- Integrated Intel®Celeron J4125/2.0GHz quad core quad thread processor
- 1*SODIMM DDR4 2400MHz RAM, is up to 8GB
- 1*VGA
- 6*Intel I226 Gigabit Ethernet(with 2 groups of BYPASS), support wake-on lan/PXE
- 1*RJ45
- 2*USB2.0
- 1U standard chassis, high-quality galvanized steel plate


Specification:

Model NO.	R41SLZ-B V1.0(J4125)	
Chassis	Structure	1U standard chassis, high-quality galvanized steel plate
	Color	Sub silver black
	Dimension	430mm*281mm*45mm
	Installation	1U standard rack
Motherboard	CPU	Integrated Intel®Celeron J4125/2.00GHz quad-core quad-thread processor ,TDP 10W
	Display	Integrated Intel® HD Graphics
	Memory	1*SODIMM slot , support single channel 2400MHz DDR4 ram, is up to 8GB
Front I/O	POWER	1*power switch, 1*reset switch
	LAN	6*Intel I226 Gigabit network card(with 2 groups of BYPASS), supports wake-on-LAN/PXE function
	COM	1*RJ45
	USB	2*USB2.0, Built-in 2*USB2.0
	LED	1*PWR LED, 1*HDD LED
Rear I/O	POWER	1*AC power input connector
	Display	1*VGA
Storage	SATA	1*2.5 inch HDD port or 1*3.5 inch HDD port(The 7pin SATA signal is the same as the 7+15p SATA signal, the default is 7+15P)
	MSATA	1*MSATA,transmission speed up to 6Gbps
Extension	Mini PCIE	1*Mini PCIE slot, supports WIFI (WiFi and LAN6 are optional, the default is LAN6)
		1*Mini-PCIE slot, support 4G module
OS support	Windows	Yes
	Linux	Yes
	Watch Dog	Support hardware reset function (L256, 0~255 seconds)
Power	Power Type	External power adaptor
	Voltage Input	AC 110~220V
	Power output	AC TO DC, 60W
Environment	Working Temp.	-10℃ ~ 50℃
	Storage Temp.	-20℃ ~ 70℃
	Relative Humidity	5%-95% relative humidity, non-condensing
	Working Vibration	0.5g rms/5-500HZ/random/operating

R41SLZ-B

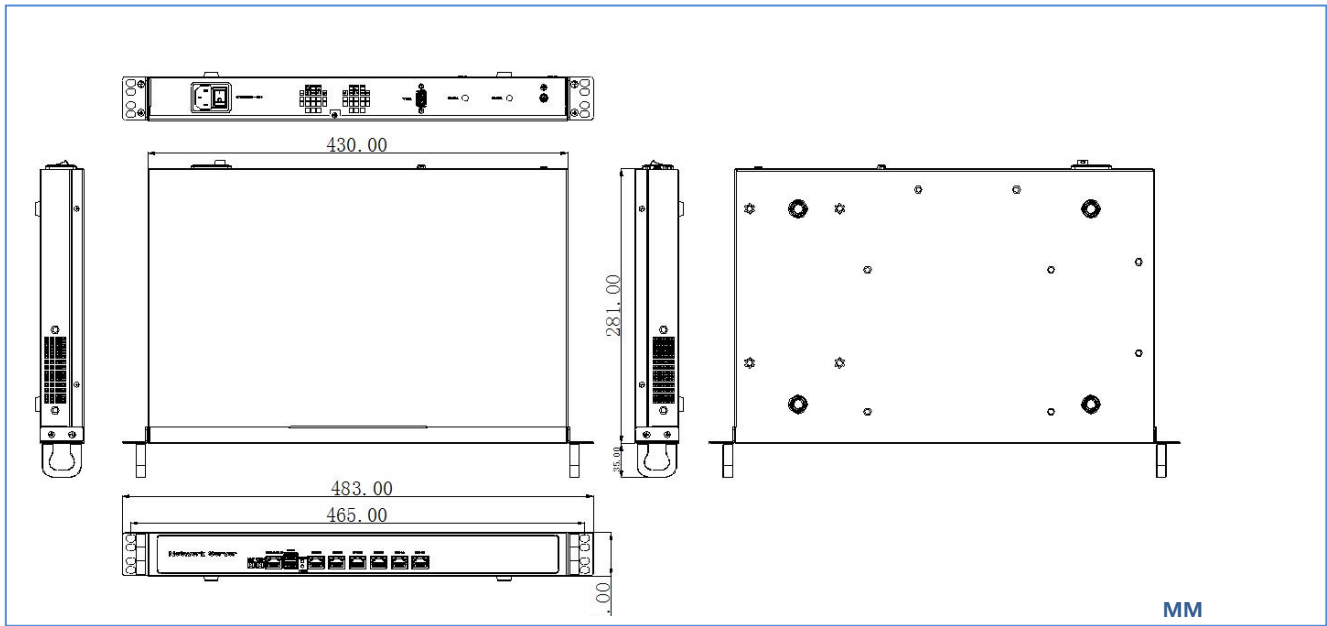

Front I/O view

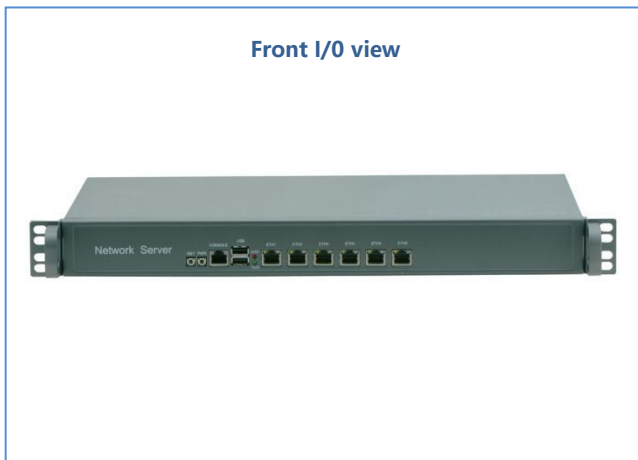

Rear I/O view



Order information:

No.	Model	Processor	Motherboard	Memory	LAN	COM	VGA	USB2.0	power
1	R19SLZ	J1900/2.0GHz	D19SL	1*SODDR3	6	1	1	2	AC220V
2	R41SLZ	J4125/2.0GHz	D41SL	1*SODDR4	6*226	1	1	2	AC220V
3	R41SLZ-B	J4125/2.0GHz	D41SL	1*SODDR4	6*226	1	1	2	AC220V