


TPC215-W2311-IS6

The appearance of the whole machine is fashionable and simple, with scientific and technological beauty, using a powerful X86 system architecture, combined with industrial-grade design and material selection; The all-metal enclosed body design has good anti-interference ability. It is widely used in industrial control, business interaction, finance, retail, communications, power, network and other automation fields.

Features

- Industrial aesthetic design, stylish and simple appearance
- Pure flat panel dust-proof and waterproof.
- Self-developed X86 architecture industrial motherboard
- Intel 6th Gen Core i5 processor, frequency: 2.3GHz
- Comply with EMC anti-electromagnetic interference standard
- Compatible with 99% of industry software, With strong expansibility



Model

Product Size	21.5"
Non-touch	TPC215-W2301-IS6
Capacitive touch	TPC215-W2311-IS6
Resistive touch	TPC215-W2321-IS6

I/O Interface



Specification

Screen Parameter

Display type	21.5" TFT LCD screen
MAX.resolution	1920*1080 (16:9)
Viewing angle(H/V)	89/89/89/89 (L/R/U/D)
Luminance (cd/m²)	300 cd/m²
Contrast ratio	1000:1

Touch Parameter

Touchscreen	Projection capacitive touch 10-point multi touch	Resistive touch single point	Non-touch
Light transmission	≥88%	≥78%	≥92%
Controller	USB (COM customized)	USB (COM customized)	/


Power Parameter

Power input	DC 12V-36V
Power adapter	24V/2.5A

Configuration

CPU	Core CX-I5-6200U Frequency: 2.3GHz, Max Turbo Frequency: 2.8GHz	Wi-Fi	Dual Band 2.4GHz+5GHz
Memory/RAM	Standard: 8GB (Supports up to 16GB)	Bluetooth	BT4.0(Optional)
Storage	Standard: 128GB SSD (optional 128GB-512GB/1T~4T SSD, 1T/2T HDD)	Watchdog Timer	Support
Integrated graphics	Intel Iris Graphics 520	RTC real time clock	Support
Operating system	Windows 7/10, Ubuntu/Centos/Redhat/Debian	Timer switch	Support

Dimension

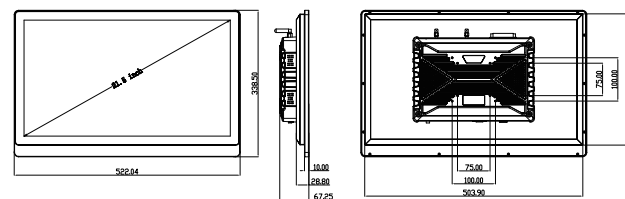

Physical Characteristic

Overall dimensions	W522 x H338.5 x D67.25mm
VESA	75x75mm, 100x100mm, M4 screw hole
Material	Aluminum alloy
Color	Silve, optional black
Installation	Support Wall mounted/Desktop/Cantilever/Boom type/Louwer Embedded, etc.

Interface Parameter

PowerSW	1*PowerSW
Power interface	1*Threaded DC port (Diameter: 5.5*2.5mm)
Phoenix terminal	1*12P Phoenix terminal (DC*1/RS232*1/RS485*1/GPIO*5)
USB	2*USB 2.0, 2*USB 3.0
VGA	1*VGA
HDMI	1*HDMI, Supporting HDMI data output, Up to 4K
SIM	1*SIM, Supporting various formats (Depending on 3G/4G module)
Ethernet	2*LAN, 10M/100M/1000M adaptive Ethernet
Audio	1*Audio I/O, Support audio input and output
Wi-Fi antenna	2*Wi-Fi antenna
Serial port	1*COM (The default is RS232, optional RS485/RS422)
Speaker	2*(8Ω2W)
Grounding	1*GND

Reliability Parameter

Operating temperature	-10°C~60°C (-20°C~70°C can be customized)
Storage temperature	-20°C~70°C
Relative humidity	95% non-condensing