

H17SL



Main Features


- Support LGA1151 socket 6~9th Intel Celeron/Pentium/Core i3~i7 processors
- 2x DDR4 RAM slot, up to 32GB
- 8x RJ45 GbE ports
- 1x HDMI
- 1x SATA; 1x MSATA SSD; 3x SATA3.0; 1x CF
- 1x Mini-PCIE(WIFI / 4G); 1x PCIE X8
- 10x USB; 2x COM; 1x SIM
- ATX power input

Specification :

Model No.	H17SL VER:1.0(LGA1151)
Processor	Support LGA1151 socket 6th/7th/8th/9th Intel®celeron/Pentium Core™ i3/i5/i7 processor Note: Only supports 4 cores at 95W, 6 cores and 8 cores only support 35W
Chipset	Adopts Intel® H170 high-speed chipset, compatible with Z170 chipset
Memory	2x DDR4 SODIMM slot, supports 2400MHz memory, up to 32GB
Graphics	Intel®HD Graphics
	1x HDMI
Network	8x Intel WGI211AT1210AT Gigabit network card, support network wake-up、PXE function
Storage	1x SATA 2.5-inch laptop hard drive slot, can directly install hard drives, transmission speed up to 6Gbps
	1x MSATA slot, supports Intel protocol SSD solid state drives, transmission speed up to 6Gbps
	3x SATA3.0 hard drive interface, transmission rate up to 6Gbps
	1x CF card slot
	Note: When using, choose between CF card slot and MSATA
Audio	N/A
Expansion slots	1x Mini-PCIE slot, supports WIFI / 4G module
	1x 8X PCIE expansion slot, expandable optical port or electrical port
Rear I/O interface	8x RJ45 Gigabit network interface
	2x USB3.0; 2xUSB2.0
	1x CISCO standard defined serial port
	1x Touch button, switch reset or one of two, default is reset
	1x Power/hard disk indicator
Built in I/O interface	1x JHDMI, 2*8pin
	1x RS232 serial port, 2*5Pin
	2x USB2.0, 2*5pin
	2x USB3.0, 2*10pin
	1x Single-layer USB2.0 interface
	1x GPIO pin header (four in and four out)
	1x Front panel switch button and indicator light interface 2*5Pin
	1x 24pin ATX power interface
	1x 2*4pin ATX power interface
	1x SIM card slot
Fan interface	1x 4pin CPU smart fan interface, 2x 4pin system fan interface
Power input	Powered by ATX power supply
BIOS	AMI 64Mb Flash ROM
GPIO	N/A

Watchdog	Support hardware reset function (256 levels, 0~255 seconds)
Working Temp.	-10℃～60℃
Storage Temp.	-20℃～70℃
Working Humidity	5%-95%(relative humidity; non-condensing)
Dimension	280mm x 209mm

Drawing:

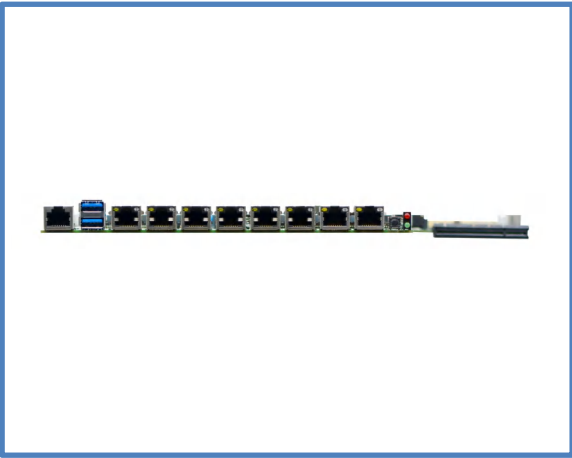

Ordering info:

NO.	Model	Processor	Frequency	Southbridge	Memory	HDMI	LAN	USB	COM	BYPASS	Power
1	H17SL VER:1.0	LGA1151	/	H170	2*SODDR4	1	8*211AT	10	2	/	ATX