

C4350Z-H2





Product features

- Integrated Intel®i5-10210U/1.6GHz 4 core 8 thread processor
- 2*DDR4 SODIMM 2666MHz memory, maximum support 64GB
- 1*HDMI1.4, 1*HDMI2.0, support dual display
- 2*RTL8111H Gigabit network card
- 2*RS232/485 DB9 serial port
- 4*USB3.0, 4*USB2.0
- DC 12V power input
- Fanless cooling structure, all aluminum alloy material

Specification:

Model NO.	C4350Z-H2 V1.0(10210U)	
Chassis	Structure	All aluminum alloy, fanless cooling structure
	Color	Gloss black
	Dimension	141*126*56.5MM
	Installation	Desktop/embedded
Motherboard	CPU	Integrated Intel®i5-10210U/1.6GHz 4 core 8 thread processor, TDP 15W
	Display	Integrated Intel® UHD Graphics , support 4K/60Hz
	Memory	2*DDR4 SODIMM memory slot,support 2666MHz memory,up to 64GB
Front I/O	POWER	1*power switch, 1*reset switch, 1*AC LOSS (power on toggle switch)
	LED	1*Power indicator light, 1*Hard disk indicator light
	USB	2*USB2.0, 2*USB3.0
	SIM	1*SIM slot
Rear I/O	Display interface	1*HDMI1.4 (4096x2304@24Hz) , 1*HDMI2.0 (4096x2304@60Hz)
	LAN	2*Realtek 8111H Gigabit network card, supports network wake-up and PXE functions
	USB	2*USB2.0, 2*USB3.0
	COM	2*RS232/485 DB9 serial port, supports the 9th pin powered function
	Audio	1*Line out, 1*MIC
	Power	1*DC 12V power input
Storage	SATA	1*2.5-inch hard drive bay
	M.2	1*M.2/SSD, support Key-M, 2280 NVME PCIeEx4 standard SSD
Expansion	Mini PCIE	1*Mini-PCIE, support 4G module
	M.2	1*M.2/WiFi, Key-E, 2230, support WIFI module
OS support	Windows	Windows 10
	Linux	Ubuntu
	Watch Dog	Support hardware reset function (L256, 0~255 seconds)
Power Require	Power Type	External power adaptor
	Voltage Input	DC 12V
	Power output	AC TO DC、 60W(Depending on specific equipment)
Reliability	Working Temp.	-10℃ ~ 50℃
	Storage Temp.	-20℃ ~ 70℃
	Relative Humidity	5%-95% relative humidity, non-condensing
	Working Vibration	0.5g rms/5-500HZ/random/operating

C4350Z-HD Dimensions

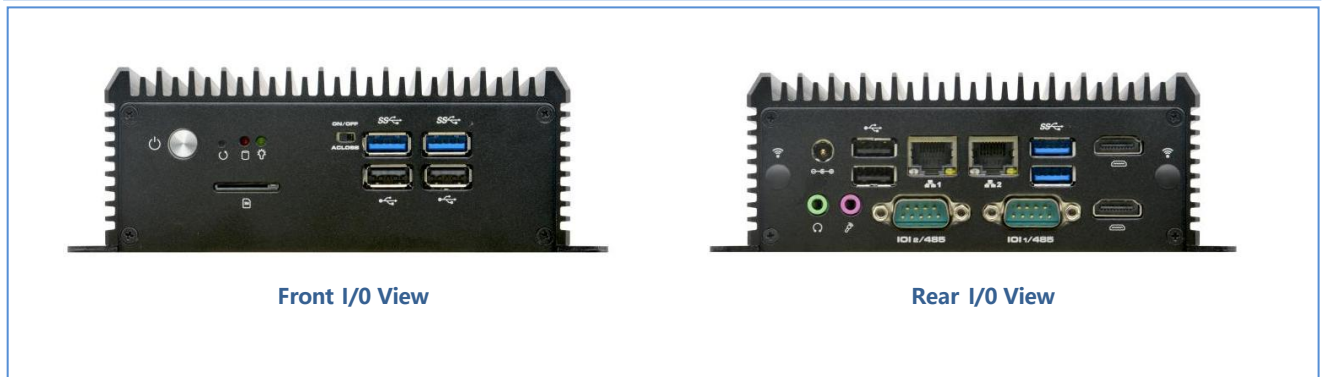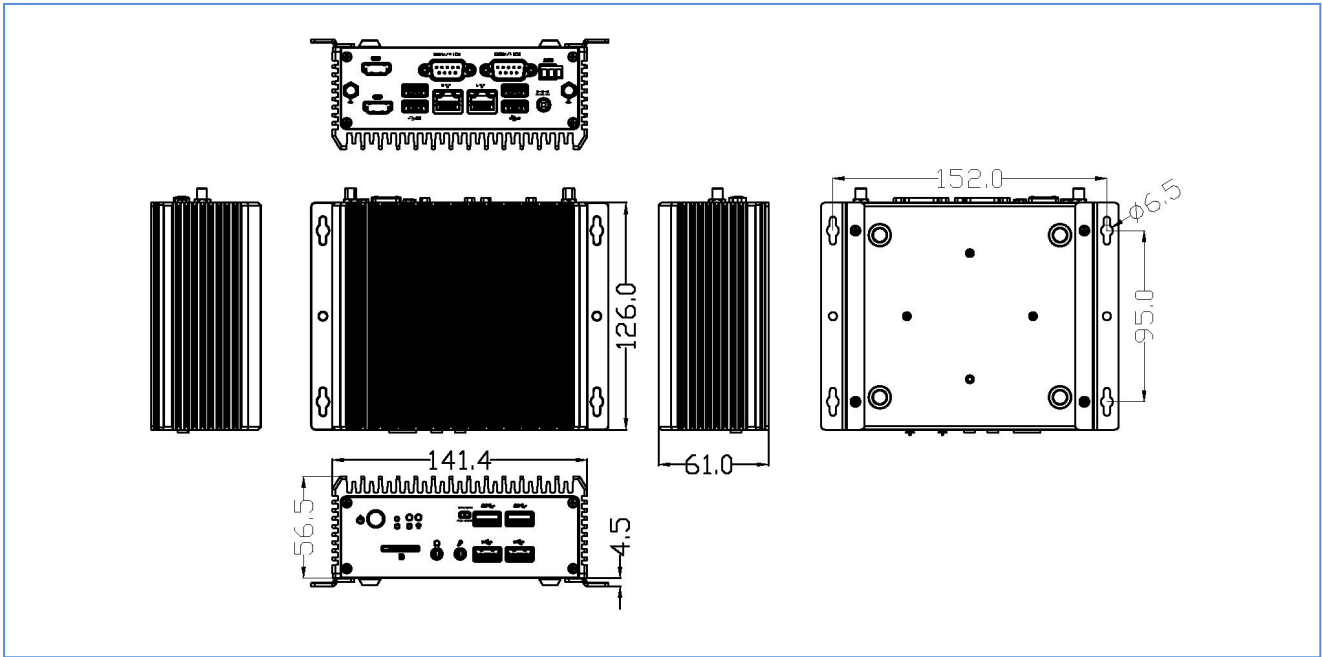

Order information:

No.	Model	CPU	Memory	Motherboard	IO Board	LAN	COM	HDMI	USB2.0	USB3.0	power
1	C4350Z-H2 V1.0(5205U)	5205U/1.6GHz	2*SODDR4	N10-C322H	N81-HD	2	2	2	4	4	DC 12V
2	C4350Z-H2 V1.0(6200U)	I5-6200U/2.3GHz	2*SODDR4	N62-I522H	N81-HD	2	2	2	4	4	DC 12V
3	C4350Z-H2 V1.0(8265U)	I5-8265U/1.6GHz	2*SODDR4	N81-I522H	N81-HD	2	2	2	4	4	DC 12V
4	C4350Z-H2 V1.0(10210U)	I5-10210U/1.6GHz	2*SODDR4	N10-I522H	N81-HD	2	2	2	4	4	DC 12V
5	C4350Z-H2 V1.0(10110U)	I3-10110U/2.1GHz	2*SODDR4	N10-I322H	N81-HD	2	2	2	4	4	DC 12V